

## Epson ColorWorks C7500 Series

### Setting New Standards In Colour Label Printing

The Epson ColorWorks C7500 Series sets new standards for reliable, high-speed, high-quality colour label printing that meets all in-house labelling needs for today's manufacturers.

#### Reliable

Combining rugged design with the latest Epson technology delivers outstanding performance that can be relied upon in industrial environments.

#### Fast

The new PrecisionCore linehead delivers fast print speeds of 300mm/sec even at high resolutions of 600 × 1200dpi.

#### Reassuring

With a standard warranty of 1 year or 500km of accumulated print<sup>1</sup>, everything is covered so you don't need to worry about replacement parts.

#### ColorWorks C7500

Ideal for prints where durability is key

#### ColorWorks C7500G

Combines excellent print quality and durability



Uses DURABrite Ultra pigment ink

Prints best on matte media



Uses UltraChrome DL pigment ink

Prints best on glossy media



#### Cost effective

Efficient, high-capacity individual ink cartridges help keep costs down.

#### Industrial strength

Standard metallic chassis, autocutter and optional winder/re-winder delivers operational longevity in any environment.

#### Add colour to variable data

Add colour by applying simple programming extensions on the ZPLII data stream.

#### Plug and play

Upgrade and replace monochrome label printers quickly and easily thanks to built-in ZPL II emulation.

#### Durable prints


Thanks to Epson DURABrite Ultra and UltraChrome DL pigment inks, prints are more durable as well as smudge, fade and liquid resistant.

#### Simple to use

An intuitive control panel, combined with effortless media roll loading and easy ink cartridge changes, ensures simple, smooth operating for all types of manufacturers.

# Technology


## PrecisionCore

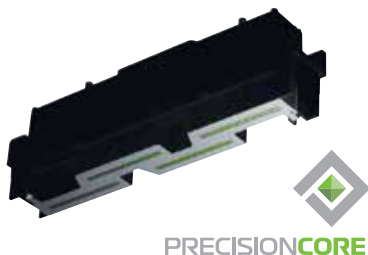

The new PrecisionCore linehead is the innovative technology powering the ColorWorks C7500 Series.


Unlike heat-based inkjet systems, PrecisionCore uses powerful micro-mechanical piezo elements to fire the ink droplets. As no heat is applied, the printhead is permanent and does not need replacing<sup>2</sup>.

## Nozzle Verification Technology (NVT)

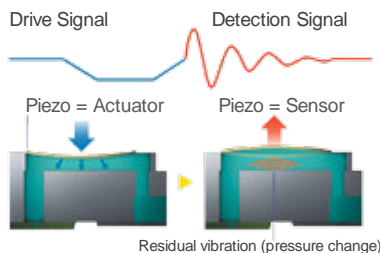

Ensure consistent, uninterrupted quality with Nozzle Verification Technology that detects blocked nozzles, and dot compensation that compensates for them. NVT works constantly behind the scenes to maximise reliability and reduce downtime.

## Variable Sized Droplet Technology (VSDT)



Epson VSDT delivers the perfect combination of speed, quality and efficient ink usage. The best ink droplet size is always selected so whether it is fine detail, or large areas of colour, the result is the perfect image, produced with optimal efficiency.


# Software

## Microsoft Windows OS drivers and Epson InstallNavi software



InstallNavi software guides you through a simple, fault-free printer installation. Print from any Windows application with Microsoft Windows<sup>®</sup> printer drivers.

## Direct Command Control

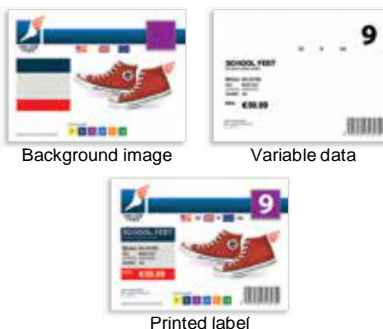

Built-in ESC/Label language is compatible with ZPL II allowing the printer to be used with existing workflows. Plus, ESC/Label ensures the ColorWorks C7500 Series printer can be controlled from any operating system and/or software architecture.

## Native drivers for leading professional labelling software



Native drivers (downloadable from the software vendor's website) use ESC/Label to allow software applications to make use of all key features of the ColorWorks C7500 Series.

# Specifications

## Product specifications

	ColorWorks C7500	ColorWorks C7500G
Technology	Printing method	Line printer (PrecisionCore MicroTFP)
	Nozzle configuration	600 Nozzles per colour
		Magenta, Yellow, Cyan, Black
	Ink technology	DURABrite™ Ultra
	Printing speed	Max. 300mm/sec at 600 × 1,200dpi (printing width 108mm)
	Printing resolution	Max. 600 × 1,200dpi
	Printing width	Max. 108mm
		Roll (8in external diameter), Fanfold paper
		Min 50mm, Max 112mm
		Die-cut label, Black mark paper, Black mark label
	Interfaces	USB 2.0 Type A, Ethernet interface (100 Base-TX / 10 Base-T)
	Autocutter	Included
	Supply voltage	100 ~ 240 V, 50 ~ 60 Hz
	Power consumption	Standby: Appx. 4W, Printing: Appx. 86W
	Temperature / humidity	Storage: -20~60 °C ( 5~85 % RH) Printing: 5~35 °C ( 20~80 % RH)
	Product dimensions	392 × 598 × 395mm (Width × Depth × Height)
	Product weight	37kg
	Printer drivers	Windows®
	Command set	ESC/Label



ESC/Label



CoverPlus

Better Products  
for a Better Future